


- MATERIAL / FINISH
1. SHELL : BRASS / NICKEL PLATED
  2. GASKET : SILICON / ORANGE COLOR
  3. BODY : BRASS / NICKEL PLATED
  4. C-RING : BRASS / NATURE
  5. INSULATION : TEFLON / NATURE
  6. BODY : BRASS / NICKEL PLATED
  7. INSULATION : TEFLON / NATURE
  8. CONTACT : BRASS / GOLD PLATED
  9. FEMALE CONTACT : BECU / GOLD PLATED

## ASSEMBLY INSTRUCTION

1. CABLE STRIP AS SHOW

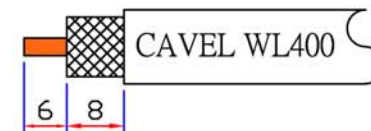


2. PUSH THE INSULATION INTO THE CENTER CONDUCTOR OF THE CABLE



3. PUSH THE CONTACT PIN INTO THE CENTER CONDUCTOR OF CABLE



4. TWIST THE CABLE INTO CONNECTOR BY SPANNER

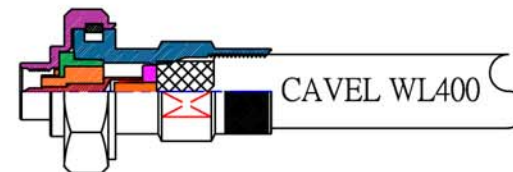

S400W

SMA MALE TWIST ON FOR  
CAVEL WL400

